



Spiral Selection Guide

Latching (Interlocking)

Left Rotation Spiral LPL

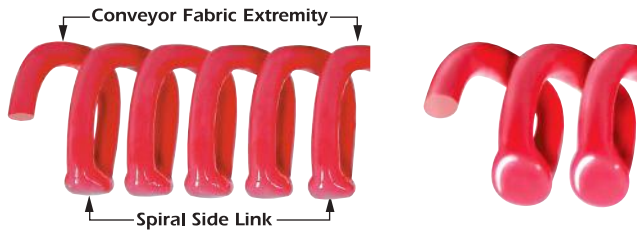


Right Rotation Spiral LPR

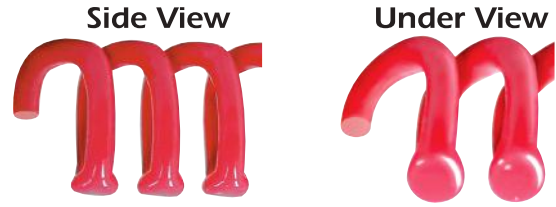


Standard

Left Rotation Spiral SPL

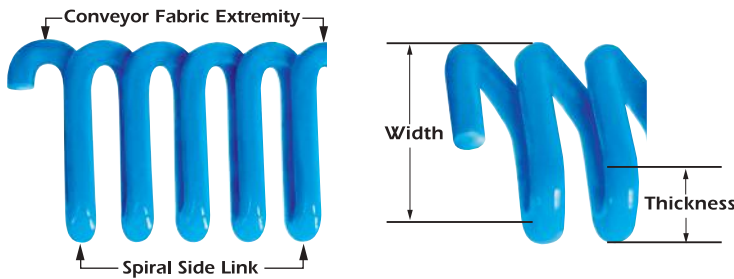

Right Rotation Spiral SPR

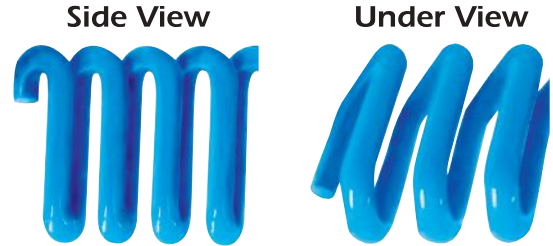

Specifications Example:

S	P	R	0.5	5.0X2.3	69
Type of spiral	Material	Rotation	Monofilament diameter	Spiral dimensions	Number of pitch
S = Standard (Without Latching System)		P = Polyester		R = Right	
L = Latching (Interlocking System)		K = Peek		L = Left	
Spiral dimensions Width X Thickness (mm)			Number of pitch of the spiral / 100 mm		

Pulp & Paper (Hydrolysis Resistance)		Food & Regular conveyors
Round monofilament diameter	Flat monofilament dimensions	Round monofilament diameter
0.40 mm White, blue or Red	0.35 X 0.70 mm Red	0.50 mm White
0.45 mm White or Red	0.42 X 0.80 mm Blue	0.70 mm White or Black
0.50 mm White, blue or Red	0.57 X 0.88 mm White	0.90 mm White or Black
0.60 mm White, blue or Red		
0.70 mm White, blue or Red		
0.80 mm White, blue or Red		
0.90 mm White or Red		

Note: Spirals are held conveyor fabric extremity up and spiral side link down (as in the pictures) in order to determine left and right rotation.



Pintle Wires, Seaming Spirals & other Conveyor Belt Accessories

We go the extra distance for you



Head office, Lippert International Inc.: 1658 Precision Park Lane San Diego, California U.S.A., 92173
Tel Sales Americas: (1)-819-340-0268 • **Tel Sales Europe:** (34)-91-797-0194 • **Fax:** (1)-888-741-0515
 • info@lippertint.com Visit our web-site for more information about our products www.lippertint.com



Lippert International Inc. is the official distributor for Lippert Pintlepin Mfg. Inc. who is ISO 9001 certified.